


EPP LED



TECHNICAL DATA

Production Name	Emergency power pack for led Panel	Highest surface temperature	70°C
Input voltage	220-240V / 50Hz	Charging	48 hours afer commissioning
Lamp used	For Led Panel	Battery charger	Nickel metal hydride Ni-MH
Emergency duration	90 - 120min back up	Brightness	90%
Battery protection	Yes	Power led	36W / 40W / 45W / 50W
Test facility	Push button switch	Output in emergency	220 - 240 V
Charge monitor	Red led Ø 5mm	Battery dimenson	Customized (L x W x H/mm)
Operation temperature	- 10°C ~ 50°C	Housed box	Metal box / Aluminum box



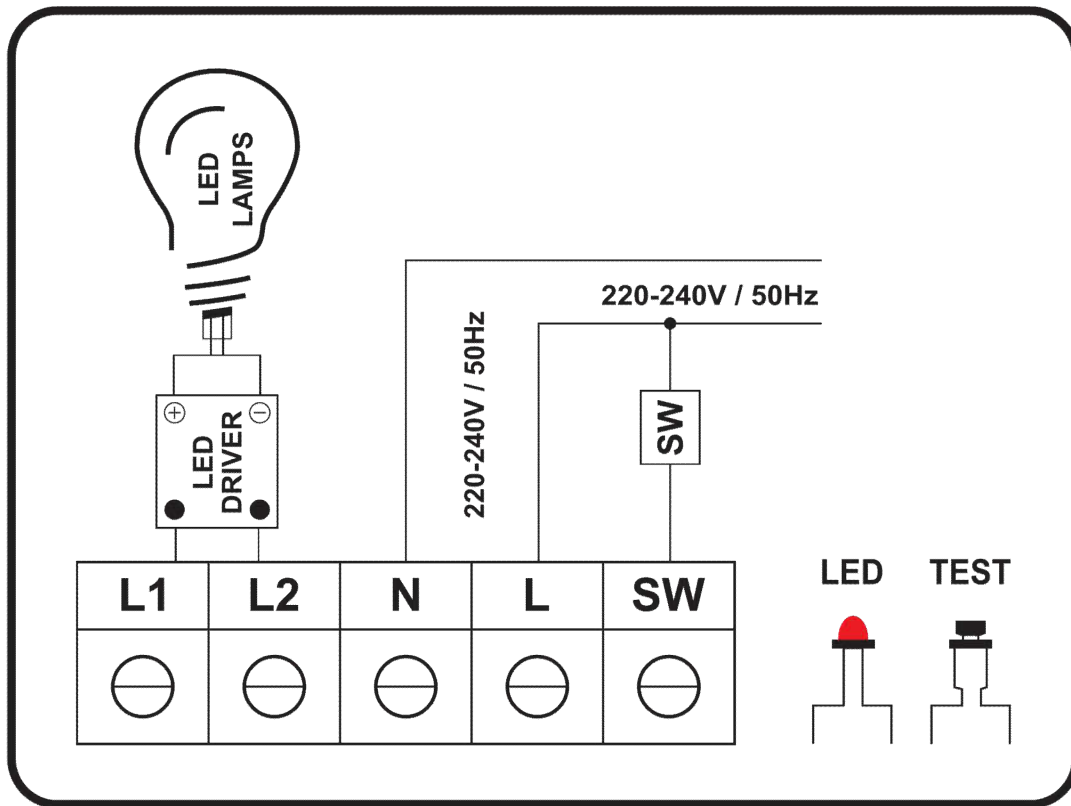

KEY FEATURES:

- High durability & Reliability
- Low maintenance
- Easy installation
- Versatile & User customisable

ORDERING GUIDE

Please check with Sales Dept if Customisation is required

Model	Led panel power	Battery charger
EPP-LED	36W / 40W / 45W / 50W	Nickel metal Hydride 12V/ 5000 - 9000mAh

